



Control # 5023603  
Conforms To UL STD 514D  
Certified To CSA STD C22.2 # 42.1


# *Hide-A-Trim*

---

FLUSH MOUNTED SOLUTIONS

Adjustable Base Plate Installation For  
STONE SURFACE  
(MARBLE, GRANITE, QUARTZ)

PLEASE WATCH THE INSTALLATION VIDEO ON OUR WEBSITE [www.hideatrim.com](http://www.hideatrim.com)

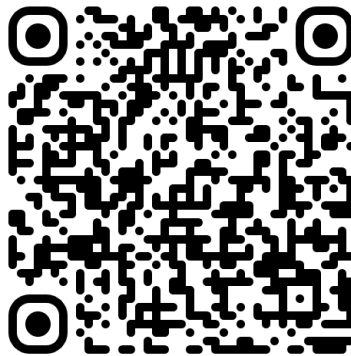

This Kit is designed to be installed by:

**First:** The electricians receive the kit(s), inspect it for correct contents, and give the faceplate to the construction supervisor/manager.

**Second:** Drywall installer

**Third:** Stone Installer

### **Stone Installation Instructions**

1. The baseplate should be given to the marble manufacturer to cut the correct size opening in the marble. The machine DXF file is available on our website for stone-cutting facilities with waterjet machines.
2. Remove the adhesive strip protection from the Raco box and install the box on the base plate's back side.
3. Use the supplied Gorilla Glue to adhere the base plate to the backside of the marble surface.
4. Install the wiring and device.
5. Install the protection plate.
6. When all the work is finished, replace the protection plate with the finished face plate.

Hide-A-Trim products are designed for installation by everyday electricians and carpenters. Instructional videos and presentations show how simple it is to get the desired results utilizing regular resources.

NOTE: If a custom finish is required, take pictures as outlined on our website. Keep a sample of the tile and the cutout piece. Fill out the form on [www.hideatrim.com](http://www.hideatrim.com). Send the sample to the following address:

Hide-A-Trim  
Nassco Products LLC  
2460 NW 17<sup>th</sup> Ln, Unit 4  
Pompano Beach FL 33064